# Mini-Com<sup>®</sup> All Metal Shielded Modular Patch Panels



#### specifications

All metal modular patch panels shall be made of stainless steel and mount to standard racks and cabinets. All metal patch panels shall accept all Mini-Com<sup>®</sup> Shielded Jack Modules for shielded installations. Patch panel write-on areas and optional adhesive labels shall identify each port and panel. Angled all metal modular patch panels shall be available in standard density 24 and 48-ports. Flat all metal modular patch panels shall be available in standard density 24 and 48-ports. Flat design in 24 and 48-ports shall also be available with built-in strain relief bar with unique features to support individual cables.

### technical information

Mounting option:	Mounts to standard EIA 19" rack, or 23" rack when used with extender brackets (PEB1 or PEB2) or cabinet	
Packaging:	Includes mounting screws (#12-24) and CPT tool for easy removal of Mini-Com® Modules	
Material:	Stainless steel	

## key features and benefits

Modular	Mini-Com <sup>®</sup> Shielded Jack Modules snap in and out of all Mini-Com <sup>®</sup> All Metal Shielded Modular Patch Panels for easy moves, adds, and changes	
Identification	Dedicated areas allow for port and panel identification with optional adhesive labels	
Built-in strain relief bar	Secures individual cables and provides proper cable support (CP24WSBLY and CP48WSBLY)	
Patented angled design	Allows cable to flow to each side of the rack and minimizes the need for horizontal cable managers; increase risk and closet density	
Strain relief bars (optional)	Different styles available to help manage and route rear cables	
Angled filler panels (optional)	Reserves space for future use and promotes proper airflow and cooling	

#### applications

Mini-Com<sup>®</sup> All Metal Shielded Modular Patch Panels and Mini-Com<sup>®</sup> Shielded Jack Modules are ideal for use in shielded cabling installations. Angled patch panels minimize the use of horizontal cable managers by allowing the cables to flow directly into vertical cable managers, thus increasing rack density. Selected flat patch panels include a built-in strain relief bar that offers integrated cable tie slots and a 1.46" surface to manage provide a properly grounded system.

and support individual cables. Mini-Com® Shielded Jack Modules bond to the panel when snapped into a Mini-Com® All Metal Shielded Modular Patch Panel. When installing the patch panel on the rack, the use of patentpending thread-forming bonding screws bond the shielded panel to the rack. The combination of all-metal patch panels. shielded jack modules and accessories

\*

and and and the many and and

	Mini-Com <sup>®</sup> Angled All Me Shielded Modular Patch	
	24-port, 1 RU:	CPA24BLY
	48-port, 2 RU:	CPA48BLY
	Mini-Com <sup>®</sup> Flat All Metal Shielded Modular Patch	
	24-port, 1 RU:	CP24BLY
	48-port, 2 RU:	CP48BLY
	Mini-Com <sup>™</sup> Flat All Metal Modular Patch Panels wi	
	24-port, 1 RU:	CP24WSBLY
	48-port, 2 RU:	CP48WSBLY
	Mini-Com <sup>™</sup> Shielded Jacl	k Modules
_	Category 6A:	CJS6X88TGY
	Category 6:	CJS688TGY
_	Category 5e:	CJS5E88TGY
-	Angled Filler Panels and	Covers
	1 RU:	CPAF1BLY
	2 RU:	CPAF2BLY
_	Transitional cover:	CPATCBL
	Strain Relief Bars and Ac	cessories
_	Strain relief bar with clips:	SRBWCY
_	Strain relief bar (straight):	SRBS19BL-XY
	Strain relief bar (U-shaped):	SRB19BLY
_	High-density strain relief bar manager:	SRBM19BLY
-	Strain relief bar brackets:	SRBBRKT
_	Bonding Screws	
	#12-24 English:	RGTBS-C
-	M6 Metric:	RGTBSM6-C
	Thread-Forming Kits	
	#12-24 English:	RGTBSG
_	M6 metric:	RGTBSM6G
	#10-32 English:	RGTBS1032G
	ME medules	DOTDOMEO


RGTBSM5G


M5 metric:

# **Mini-Com® All Metal Shielded Modular Patch Panels**


#### label chart

Part Number	Lable Type	Laser/Ink	LS8	Thermal
CPA24BLY	Adhesive	C252X030FJJ	C252X030FJC	C252X030YPT
CPA48BLY				
CP24BLY				
CP48BLY				
CP24WSBLY				
CP48WSBLY				

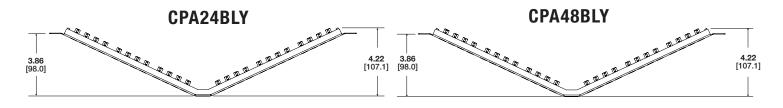

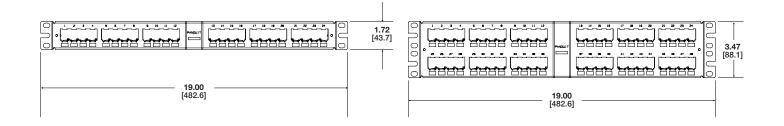


**CP24WSBLY** 

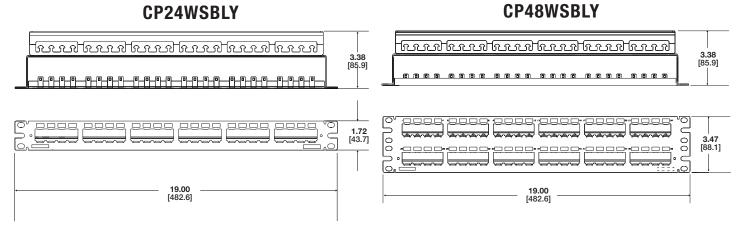

Dimensions are in inches [Dimensions in brackets are metric]

# **Mini-Com® All Metal Shielded Modular Patch Panels**

## label chart

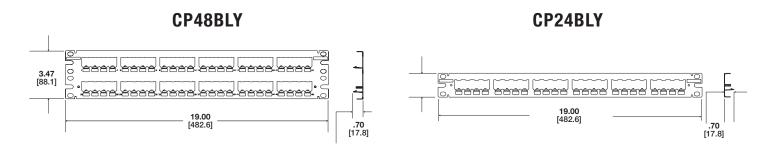

Dimensions are in inches [Dimensions in brackets are metric]

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information Visit us at www.panduit.com Contact Customer Service by email: cs@panduit.com or by phone: 800.777.3300 © 2020 Panduit Corp. ALL RIGHTS RESERVED. Printed in the U.S.A. COSP319--WW-ENG 3/2020