

CAT3 VOICE GRADE CABLE

12 PAIR (24 CONDUCTOR)

LOW SMOKE ZERO HALOGEN




DESCRIPTION

Category-3, UTP, 24awg 24 Conductor,
Solid-Bare Copper.

FEATURES

- Suitable for Telephony Communication
- 12-Pair – Cabled together with varying lays
- 24AWG Solid Bare Copper Conductors
- LSZH Jacket, RoHS Compliant, ETL Listed
- 305M Wooden Spool

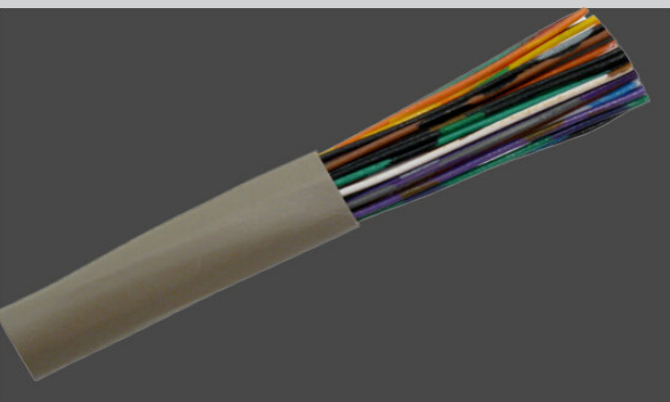

Technical Data

Rated Temperature	70 °C
Rated Voltage	30V
Conductor	Solid Bare Copper
Size	24 AWG
Dia. (±0.005mm)	0.50

Insulation	PVC
Average Thickness (mm)	0.203
Min. Point Thickness (mm)	0.172
Insulation Dia. (±0.20mm)	0.91
Twisted Pair Dia. (±0.01)	1.82

Nylon Tape	Yes
Assembly Dia. (mm)	6.60
Jacket	LSZH
Average Thickness (mm)	0.75
Min. Point Thickness (mm)	0.65
Outer Dia. (±0.20mm)	8.10
Rip cord	Yes

Electrical Characteristics

Impedance	100±15 Ohms
D-C Resistance of each Core (ohms/km)	98(Max)
The average of Imbalance of D-C resistance upon cores	≤2.0%

Mechanical Characteristics

Test Object	Jacket
Test Material	LSZH
Before Tensile Strength (Mpa)	≥13.8
Aging Elongation (%)	≥100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	≥85% of unaged
Aging Elongation (%)	≥50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

As per customer's request

Jacket color available in
Gray



CAT3 VOICE GRADE CABLE

12 PAIR (24 CONDUCTOR)

LOW SMOKE ZERO HALOGEN

PAIR COLORS

Pair1 White with Blue ring -- Blue with White ring
Pair2 White with Orange ring -- Orange with White ring
Pair3 White with Green ring -- Green with White ring
Pair4 White with Brown ring -- Brown with White ring
Pair5 White with Gray ring -- Gray with White ring
Pair6 Red with Blue ring -- Blue with Red ring
Pair7 Red with Orange ring -- Orange with Red ring
Pair8 Red with Green ring -- Green with Red ring
Pair9 Red with Brown ring -- Brown with Red ring
Pair10 Red with Gray ring -- Gray with Red ring
Pair11 Black with Blue ring -- Blue with Black ring
Pair12 Black with Orange ring -- Orange with Black ring

TECH DRAWING

