




4Pairs CAT6 SFTP OUTDOOR CABLE SPE

Cross Section

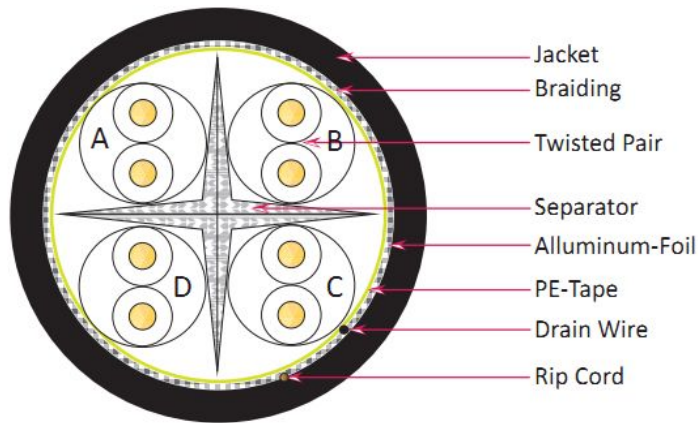

Marking

Description

Rated Temperature (°C) 75

Application

Horizontal Wiring in LAN

Reference Standard

cETLus(UL Subject 444)

EIA/TIA568 & ISO/IEC 11801

Construction

Conductor Solid Bare Copper

AWG 23

Conductor Dia. (±0.005mmmm) **0.57**

Insulation PE

Average Thickness(mm) 0.255

Min. Point Thickness(mm) 0.235

Insulation Dia.(±0.01mm) **1.08**

Twisted Pair Dia.(±0.02mm) 2.16

Filler PE

PE-Tape(mm) Yes

Drain wire (Tinned Copper) 0.40

Al Foil Shield Yes

Braiding(TC) 80*0.12

Assembly Dia.(±0.2mm) 6.2

Jacket LLDPE

Average Thickness(mm) 0.60

Min. Point Thickness(mm) 0.55

Outer Dia.(±0.1mm) **7.60**

Rip Cord Nylon

Color

Insulation colors are:

Blue,White/Blue

Orange,White/Orange

Green,White/Green

Brown,White/Brown

Jacket colors:

Black

Performance

Electrical Characteristics:

Frequency	Return loss	Attenuation	NEXT
(MHz)	(Min dB)	Max (dB/100m)	(Min dB)
1	20	2	74.3
4	23	3.8	65.3
8	24.5	5.3	60.8
10	25	6	59.3
16	25	7.6	56.2
20	25	8.5	54.8
25	24.3	9.5	53.3
31.25	23.6	10.7	51.9
62.5	21.5	15.4	47.4
100	20.1	19.8	44.3
200	18	29	39.8
250	17.3	32.8	38.3

Frequency	PSNEXT	ELFEXT	PSELFEXT	Delay
(MHz)	Min (dB)	Min (dB/100m)	Min (dB/100m)	Max (ns/100m)
1	72.3	67.8	64.8	570.0
4	63.3	55.8	52.8	552.0
8	58.8	49.7	46.7	546.7
10	57.3	47.8	44.8	545.4
16	54.2	43.7	40.7	543.0
20	52.8	41.8	38.8	542.0
25	51.3	39.8	36.8	541.2
31.25	49.9	37.9	34.9	540.4
62.5	45.4	31.9	28.9	538.6
100	42.3	27.8	24.8	537.6
200	37.8	21.8	18.8	536.5
250	36.3	19.8	16.8	536.3

1.0-100.0MHz Impedance (ohms)	100 ± 15
1.0-100.0MHz Delay Skew (ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	72.2
Resistance Unbalance (%)	<=5

Mechanical Characteristics:

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend(-20±2°Cx4hrs)	No crack

Packaging:

305M

Wooden Spool