



- **Standard Analogue phone (PSTN)**
- **Robust housing, constructed of cold rolled steel with powder coat**
- **Vandal resistant handset and armored cord**
- **Full Rugged & durable keypad, easy to operate**
- **Wall mounting, simple installation**
- **Weather proof protection to IP55-IP65**
- **Programmable for auto-dial**
- **Phone line powered**
- **Inductive coupler fitted as standard for hard of hearing**
- **CE, FCC compliant**

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.

Standard Analogue

As a standard analogue telephone, this unit provides basic telephone functions and can be connected to any standard two-wire telephone line, including analogue PABX lines and PSTN.

Auto dial (Hot line)

This can be used to initiate a PABX 'hotline' or lift handset and wait for reply, where the PABX does the call routing/dialing. Auto-dial on handset lift also available.

The keypad can be used for entering code/password while conversation.

E.g.: Mounted at ATM machines side. As a service telephone, it auto dials to the help center when users pick up the handset, during the conversation users can enter code/ID number by the keypad when it is required.

As well as the standard telephone range, J&R can supply specials to order with customized Options.

TECHNICAL SPECIFICATIONS

Casing Material

Cold rolled steel body

Colors: RED, YELLOW, GREY

Handset Material

ABS material handset with stainless steel spiral cord.

Keypad

Weather sealed tactile digital keypad. Chrome key and frame made of zinc alloy. Vandal resistance.

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

Weather Resistance

IP55

Ringling Tone

Shrill warble tone 80 dBA @ 1 metre typical

Hook switch

Electronic / magnetic with no visible moving parts

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 40,000 hours using

Weight

Up to 4 kg depending on option

ANALOGUE

Dialing

MF (tone)

Power supply

Drawn from telephone line


Lightning / Transients

Protection to ITU-T k.21 enhanced levels

Programming

Can be programmed as an auto-dial phone

DIMENSIONS:

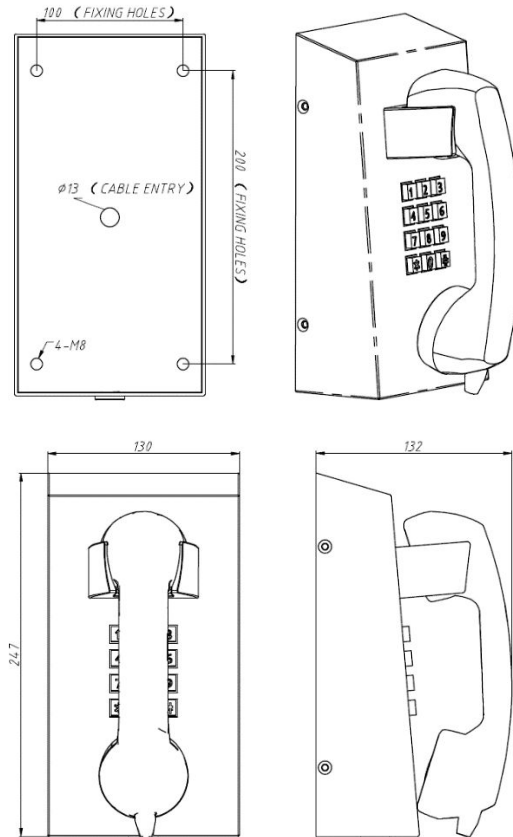

(Measured in mm)

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B

PACKAGE

unit size: 247 *130 *132(mm)

Carton size: 340 *235 *165(mm)

Packaging materials: pearl cotton, carton

Gross weight: 3.5KG Net weight: 2.7KG