



- SIP and GSM integrated phone
- SIP call in priority and GSM for back up
- Robust housing, constructed of metal casing
- Vandal resistant metal button
- Hands free operation
- 1 button for speed dialing
- On wall mounting, simple installation
- Weather proof protection IP54 to IP65
- 12V DC powered
- RJ45 Port for SIP connection
- 4 X Tamper proof screws for mounting
- CE, FCC compliant

The Hands free Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in cold rolled steel box with stainless steel plate and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the push button is weather and vandal resistant.

SIP-VoIP SPECIFICATIONS

Power Input:

12-24V DC

Port:

WAN: 10/100Base- T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base- T RJ-45 for PC, Auto MDIX

Power Consumption:

Idle:1.5W/ Active:2W

Voice Features

- Support SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex
- SIP support SIP domain, SIP authentication (none, basic, MD5), DNS name of server
- DTMF: SIP info, DTMF Relay, RFC2833
- Call control features: Flexible dial map, support hot-line

Network Features

- WAN/LAN: support Bridge mode
- Support static IP address
- Support DHCP get IP on WAN port
- Support VLAN
- Support web config

GSM SPECIFICATIONS

Frequency Range:

850/900/1800/1900MHZ

Power supply

12V DC

Power Consumption:

Idle:0.4W/ Active:2W

Remote programming

Auto-dial numbers can be programmed by SMS

Configuration

Remotely programmable via SMS

Remote monitoring

Remote health-check and fault reporting via SMS

TECHNICAL SPECIFICATIONS

Casing Material

Cold rolled steel box with stainless steel plate

Push Button

Stainless steel push button

Temperature

Operating: -30°C to +65°C

Storing: -40°C to +75°C

Weather Resistance

IP54 to IP65

Ringtone

Shrill warble tone 85 dBA @ 1 metre typical

M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

PACKAGE

unit size: 230 *160 *80(mm)


Carton size:340 *235 *165(mm)

Packaging materials: pearl cotton, carton

Gross weight: 4KG

Net weight: 3KG

DIMENSIONS

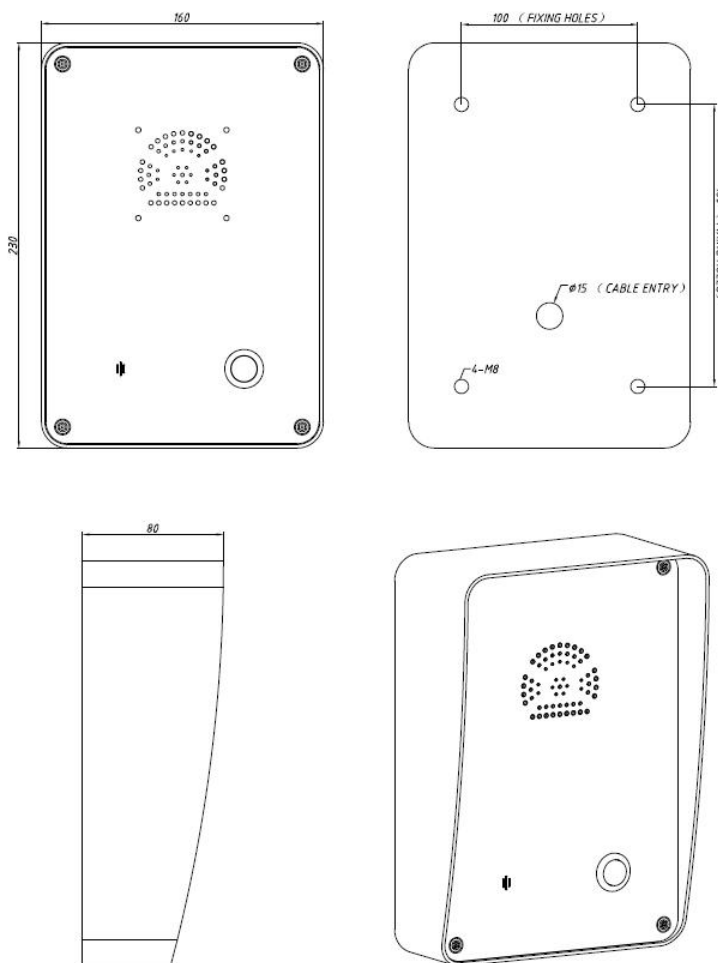

(Measured in mm)

APPROVALS



This mark indicates compliance with the:
Radio & Telecommunications Terminal Equipment
Directive
2004/108/EC



This mark indicates compliance with the:
FCC Part 15 Subpart B Class B