
Instruction Manual

Remove the stopper before installation.







0	160	TIA/EIA T568A	TIA/EIA T568B	INDUSTRIAL
_	4 6	White/Green Green	White/Orange Orange	Yellow Orange
PIN		White/Orange Orange	White/Green Green	White Blue
IX	NSIS 5	Blue White/Blue	Blue White/Blue	
Z		White/Brown Brown	White/Brown Brown	

Insert cable into strain relief boot, strip off 1.2 inch of cable jacket, fold back the drain wire.





Fan out all four twisted pairs, following the color coding label and allocate each conductors into proper slots on wiring cap.


Trim the ends of conductors.



Remove the wiring label before place wiring cap on plug.






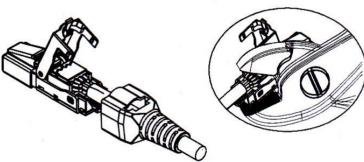

Open shielded cap


Close plug cover, make sure the drain wire is in proper contact with grounding clip on plug.

Pull back strain relief boot to cover the plug, fasten supplied cable tie to secure grounding contact.

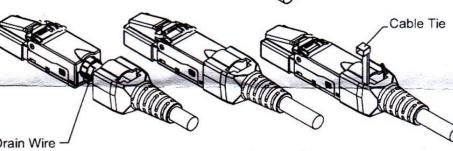

Unload the cable

Cut off cable tie, remove the boot. Using flat screw driver and pry gently on plug cover one end first and the other end subsequently to open it.

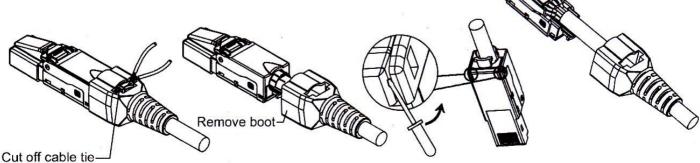

Boot adjustment

Cut the end of boot to fit your cable OD.



